



*SPEC SHEET*

# Refrigerated Salad Bar Drop In



## Specifications

Food well is constructed with 18 gauge 304 stainless steel #4 finish. The outer walls are 20 gauge galvanized and is foam insulated. The food well is 8" deep and has a 2" recessed edge that supports the pan adapters and allows cold airflow over food pan. No screws are used in the construction of the well.

Refrigerated system is cold wall refrigeration, utilizing a 1/2 HP compressor operating on 404A refrigerant. The temperature is preset at the factory and frost will form on the top and recessed edge.

Drop ins are also available in a slimline configuration and custom sizes.



Custom size 42" L x 7" W

PROJECT: \_\_\_\_\_

ITEM #: \_\_\_\_\_

MODEL: \_\_\_\_\_

## Standard Features

- Installs in your new or existing counter
- Control panel with 3' standard conduit length
- Compressor located on left
- 404A refrigerant
- Hard wire connection
- Twist counter locking system

## Options

- Cord and plug; specify length
- Control panel conduit length; specify length
- Adapter bar set
- Compressor located on right
- Custom sizes available for your counter

## Accessories

- Pan adapters
- Crock inserts
- Small adapter bar
- Large adapter bar

Note: When installing in existing or new counter, provide adequate airflow for maximum performance and to avoid damaging the compressor.



**Intertek**

Sanitation Listed  
Conforms to Std. NSF #7  
Commercial Refrigerators  
and Storage Freezers




**Intertek**

4003279


Rev 04/2019




# Refrigerated Salad Bar Drop In




TOP VIEW

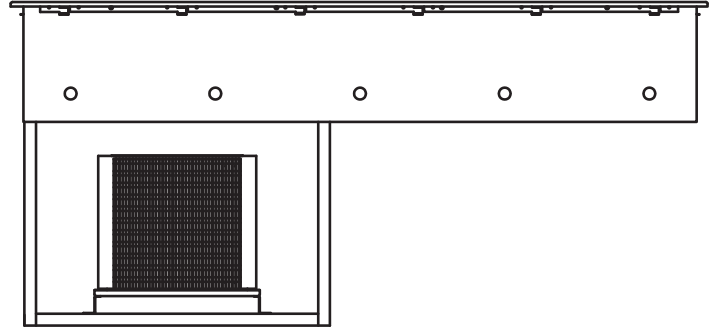

FRONT VIEW

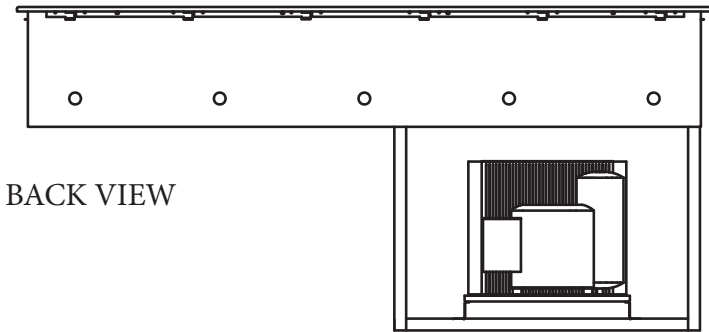

BACK VIEW

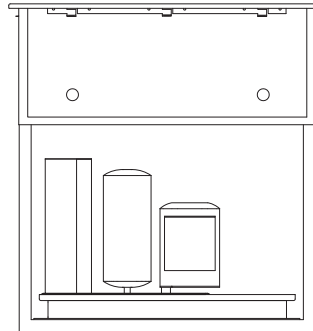

END VIEW

COUNTER CUTOUT

| ITEM  | MODEL   | LENGTH | WIDTH   |
|-------|---------|--------|---------|
| C0971 | SB2DI   | 32"    | 25-5/8" |
| C0972 | SB2DISL | "      | 25-5/8" |
| C0974 | SB3DI   | 47"    | 25-5/8" |
| C1130 | SB4DI   | 61"    | 25-5/8" |
| C1137 | SB5DI   | 76"    | 25-5/8" |

CONTROLS CUTOUT

| LENGTH | HEIGHT |
|--------|--------|
| 6"     | 5-1/2" |

| ITEM  | MODEL   | LENGTH  | WIDTH   | HEIGHT  | PAN CAPACITY | VOLT | Hz. | REQUIREMENT | CORD | PLUG      |
|-------|---------|---------|---------|---------|--------------|------|-----|-------------|------|-----------|
| C0971 | SB2DI   | 33-1/4" | 26-1/2" | 27-7/8" | 2            | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0972 | SB2DISL |         |         | 27-7/8" | 2            | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0974 | SB3DI   | 48-1/4" | 26-1/2" | 27-7/8" | 3            | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C1130 | SB4DI   | 62-1/4" | 26-1/2" | 27-7/8" | 4            | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C1137 | SB5DI   | 77-1/4" | 26-1/2" | 27-7/8" | 5            | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |