



SPEC SHEET

# Refrigerated Salad Bar Cabinet



## Specifications

Top is 16 gauge 304 stainless steel #4 finish. Front and back edges are turned down 102° and turned back 90° eliminating the gap between the top and the base of the cabinet. The ends are turned down 90° flush with cabinet base, this eliminates any open space between G.A. Systems cabinets. The top is secured to the base with 4 stainless steel flush head screws. One staggered interior edge turned down 90° to accommodate the pan adapters. The top is foam filled insulated. One 3/4" diameter pin is welded at each end of the top. Each pin has two 5/16" diameter holes. The lower hole is used to join adjacent G.A. Systems cabinets.

Body of cabinet is fabricated of 1" square 18 gauge stainless steel and cold rolled tubing to form the top and bottom frames. Each is welded to 1-1/2" square 18 gauge stainless steel corner posts. Each corner post is filled with a urethane foam type insulation and capped. All joints are welded with all exposed welds being ground and polished. 20 gauge galvanized body panels are welded to tubing super structure.

Food well is constructed with 18 gauge 304 stainless steel #4 finish. The outer walls are 20 gauge galvanized and is foam insulated. The food well is 8" deep and has a 2" recessed edge that supports the pan adapters and allows cold airflow over food pan. No screws are used in the construction of the well.

Exterior front, back and ends are trimmed with 22 gauge stainless steel #4 finish trim to accept laminated color panels. Laminate is applied to 1/8" board for additional strength.

Front removable access louver panel is fabricated of 18 gauge 304 stainless steel #4 finish.

Bottom is fully enclosed. There is a 3-3/4" clearance from the bottom of the cabinet to the floor. Plate type 3" swivel non-marking casters with brakes. Cabinet heights are ADA compliant.

PROJECT: \_\_\_\_\_

ITEM #: \_\_\_\_\_

MODEL: \_\_\_\_\_

## Standard Features

- Locking pins, one at each end
- On/off switch
- Compressor located on left
- 404A refrigerant
- Plate type 3" swivel non-marking casters with brakes

## Options

- No Pins
- Solid Surface Top (in lieu of stainless steel top)
- Refrigerated under storage

63" length will include one self closing stainless steel door / C0472  
76" length will include two self closing stainless steel doors / C0547



## Accessories

- Pan Adapters
- Crock Inserts
- Tray Slide Stainless Steel
- Tray Slide Solid Surface Material
- Double Sided Sneeze Guard Glass
- Double Sided Sneeze Guard Acrylic
- Single Sided Sneeze Guard Glass
- Single Sided Sneeze Guard Acrylic
- Single Sided Self Serving Sneeze Guard Acrylic
- Cash Shelf 15"
- Cash Shelf 20"
- Cash Shelf 24"
- Tray Shelf 12"
- Tray Shelf 15"
- Tray Shelf 18"
- Toe Kick
- Premium High Pressure Laminate
- Graphic Panels Stand-off
- Graphic Vinyl Decals

Refrigerated system is cold wall refrigeration, utilizing a 1/2 HP compressor operating on 404A refrigerant. The temperature is preset at the factory and frost will form on the top and recessed edge.



Intertek



Intertek

4003279



Note: Do not position cabinet with louvered panel against wall or other equipment. Damage to compressor could result.

Sanitation Listed  
Conforms to Std. NSF #7  
Commercial Refrigerators  
and Storage Freezers

Rev 04/2019



# Refrigerated Salad Bar Cabinet

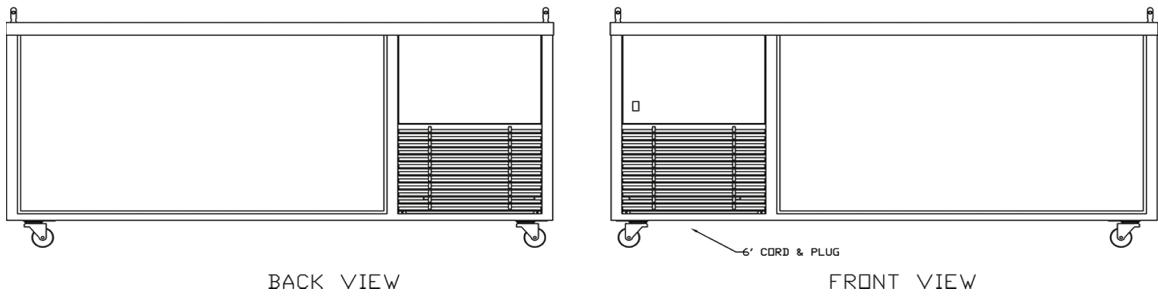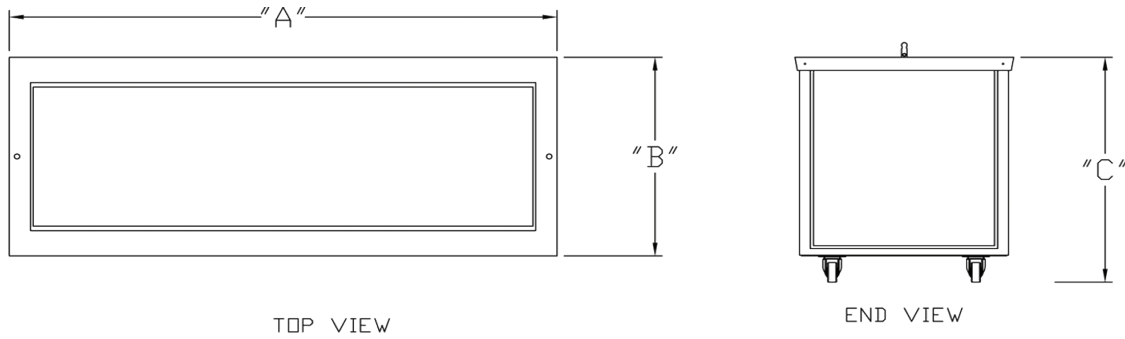

| ITEM  | MODEL   | LENGTH | WIDTH   | HEIGHT  | LBs | VOLT | Hz. | REQUIREMENT | CORD | PLUG      |
|-------|---------|--------|---------|---------|-----|------|-----|-------------|------|-----------|
| C0173 | SB48    | 48"    | 30-3/8" | 34"     | 300 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0298 | SB50    | 50"    | 30-3/8" | 34"     | 325 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0105 | SB63    | 63"    | 30-3/8" | 34"     | 350 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0174 | SB76    | 76"    | 30-3/8" | 34"     | 450 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C1171 | ESB48   | 48"    | 30-3/8" | 31-1/2" | 300 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C1106 | ESB55   | 55"    | 30-3/8" | 31-1/2" | 315 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0641 | ESB6036 | 60"    | 36-3/8" | 31-1/2" | 325 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0172 | ESB63   | 63"    | 30-3/8" | 31-1/2" | 350 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0176 | ESB76   | 76"    | 30-3/8" | 31-1/2" | 450 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |
| C0638 | ESB6336 | 63"    | 36-3/8" | 31-1/2" | 350 | 120  | 60  | 1Ø 15 AMP   | 6'   | NEMA 5-15 |