



SPEC SHEET

Speedee Serv® Speedline Freezer Cabinet



Specifications

Top is 16 gauge 304 stainless steel #4 finish. Front and back edges are turned down 102° and turned back 90° eliminating the gap between the top and the base of the cabinet. The ends are turned down 90° flush with cabinet base, this eliminates any open space between G.A. Systems cabinets. The top is secured to the base with 4 stainless steel flush head screws. Two staggered interior edges turned down 90° to accommodate the lids. The top is foam filled insulated. One 3/4" diameter pin is welded at each end of the top. Each pin has two 5/16" diameter holes. The lower hole is used to join adjacent G.A. Systems cabinets, the upper hole is used to secure the locking bar.

Body of cabinet is fabricated of 1" square 18 gauge stainless steel and cold rolled tubing to form the top and bottom frames. Each is welded to 1-1/2" square 18 gauge stainless steel corner posts. Each corner post is filled with a urethane foam type insulation and capped. All joints are welded with all exposed welds being ground and polished. 20 gauge galvanized body panels are welded to tubing super structure. An inner liner between outer walls and interior food well is constructed of 22 gauge stainless steel with 2B finish and surrounded with 1-1/4" #2000 urethane foam.

Food well is constructed with 20 gauge 2B stainless steel with a white powder coated finish. The food well overall storage capacity is 4.87 cubic feet.

Exterior front, back and ends are trimmed with 22 gauge stainless steel #4 finish trim to accept laminated color panels. Laminate is applied to 1/8" board for additional strength.

Front removable access louver panel is fabricated of 18 gauge 304 stainless steel #4 finish.

Bottom is fully enclosed. There is a 3-3/4" clearance from the bottom of the cabinet to the floor. Plate type 3" swivel non-marking casters with brakes. Cabinet heights are ADA compliant.

Lid is stainless steel lift off bi-fold design, is insulated and has two black rubber handles that act as a bumper when opening.

Freezer system has a cold wall type refrigeration system and is activated when the cabinet is plugged into electrical source. Temperature is preset at the factory to hold prepacked frozen food items between 0°F to -10°F.

Electrical requirements are 120Volt/60Hz/Single Phase 15 Amp circuit. 6' cord with NEMA 5-15P plug requiring a NEMA 5-15R receptacle. 1/4 HP compressor draws 4.0 amps.

PROJECT: _____

ITEM #: _____

MODEL: _____

Standard Features

- Locking pins, one at each end
- Locking bar to secure lid
- Plate type 3" swivel non-marking casters with brakes
- R-448A refrigerant
- Stainless steel lift off bi-fold insulated lid with rubber handles

Accessories

- Tray Slide Stainless Steel
- Tray Slide Solid Surface
- Cash Shelf 15"
- Cash Shelf 20"
- Cash Shelf 24"
- Tray Shelf 12"
- Tray Shelf 15"
- Tray Shelf 18"
- Toe Kick
- Premium High Pressure Laminate
- Graphic Panels Stand-offs
- Graphic Panels Vinyl

Cold wall type refrigeration system uses R448A refrigerant. The refrigeration system is activated when unit is plugged into an electrical source. Bottom drain is provided with exterior drain outlet, this outlet is located behind the louver panel. Thermostat is preset at factory to hold frozen foods items at 0°F to -10°F.

Note: Do not position cabinet with louvered panel against wall or other equipment. Damage to compressor could result.




Certified to CAN/CSA Std. C22.2 #120
Conforms to ANSI/NSF Std. #7

Rev 03/2026



Speedee Serv® Speedline Freezer Cabinet


A = WIDTH
B = DEPTH
C = HEIGHT

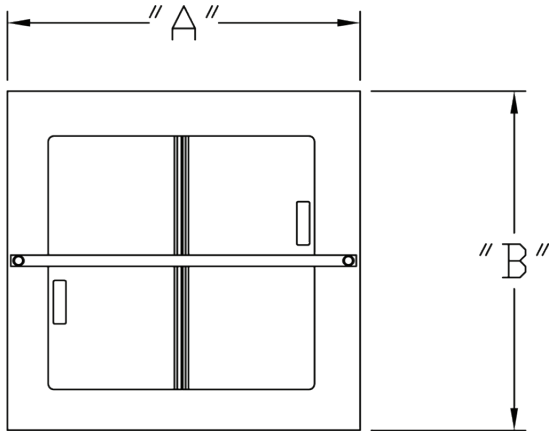


6' Cord NEMA 5-15P
Receptical Flush Mount

TOP VIEW


Electrial Requirement
120 Volt 60 Hz Single Phase 15 Amp Circuit.
6' cord with NEMA 5-15P plug.
Requiring a NEMA 5-15R receptacle.
Actual amp draw 4 amps when running with safety factor.

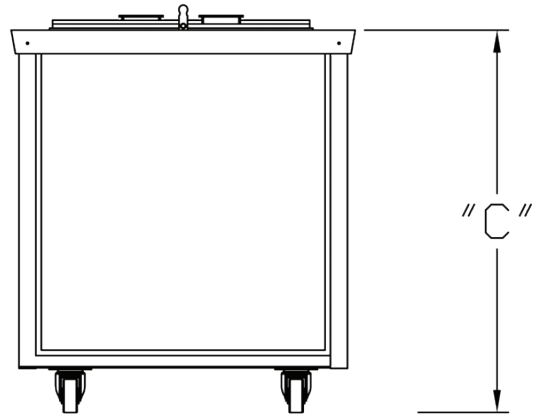

END VIEW

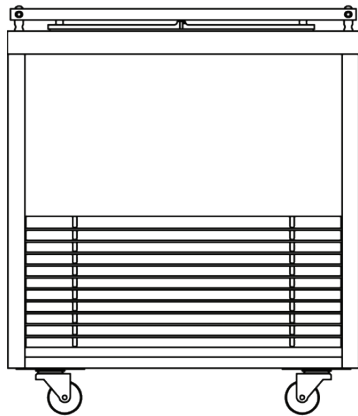

FRONT VIEW

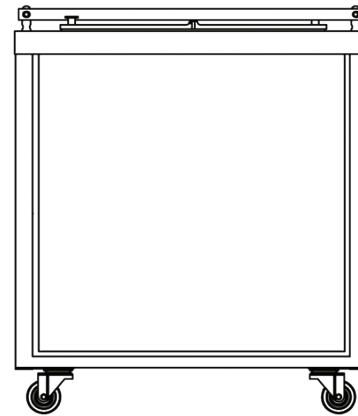

BACK VIEW

ITEM	MODEL	WIDTH	DEPTH	HEIGHT	LBS	Volt	Hz.	Requirement	Cord	Plug
C0107	F3	31-3/8"	30-3/8"	34"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15
C0147	F336	31-3/8"	36-3/8"	34"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15
C0148	EF3	31-3/8"	30-3/8"	31-1/2"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15
C0149	EF336	31-3/8"	36-3/8"	31-1/2"	250	120	60	1Ø 15 AMP	6'	NEMA 5-15